

MTX-GTW

• HARDWARE • USER **GUIDE**



www.mtxm2m.com

Index

GENERAL NOTES	5
IMPORTANT INFORMATION	5
SERVICE AND SUPPORT	5
REVISION INFORMATION	6
DESCRIPTION	7
1. Product Label	7
WARRANTY.....	8
REFERENCES.....	9
TECHNICAL DATA	10
1. System Architecture and System Functionality.....	10
1.1 Block Diagram	10
1.2 Technical Data Electronics	10
1.2.1 External Interfaces	11
1.2.2 Internal Interfaces	11
1.2.3 User's Interfaces	11
1.2.4 System Components	11
1.3 Technical Data Mechanics, Design	11
ELECTRONIC SPECIFICATIONS.....	12
1. External Interfaces.....	12
1.1 Function Specification.....	12
1.1.1 USB OTG	12
1.1.2 Ethernet.....	13
1.1.3 RS232/485/422.....	14
1.1.4 RS232_1.....	16
1.1.5 RS232_2	17
1.1.6 CAN	18
1.1.7 Power Supply.....	19
2. Internal Interfaces	20
2.1 TQMa28	20

2.2 WiFi	20
2.3 Expansion Connector	20
3. User Interfaces.....	21
3.1 Status LED	21
3.2 DIP Switch.....	21
4. System Components.....	22
4.1 Temperature Sensor	22
4.2 EEPROM.....	22
4.3 RTC	22
MTX-GTW VERSIONS	23
1. MTX-GTW-3G	23
1.1 1-Wire.....	23
1.2 Relay Output	24
1.3 GPIOs	25
1.4 Accelerometer	25
1.5 Antennas Configuration	26
2. MTX-GTW-3G-GPS	27
2.1 1-Wire.....	27
2.2 Relay Output	28
2.3 GPIOs	29
2.4 Accelerometer	29
2.5 Antennas Configuration	30
MECHANIC SPECIFICATIONS.....	31
1. Overview	31
2. Requirements for the superior system.....	33
2.1 Protection Against External Effects	33
2.2 Thermal Management	33
SAFETY REQUIREMENTS AND PROTECTION REGULATIONS.....	34
1. Safety Instructions.....	34
2. General Precautions.....	35
3. SIM Card Precautions.....	36
4. Antenna Precautions	37

5. Radio Frequency (RF) Exposure and SAR	38
6. Personal Medical Devices	39
CONFORMITY ASSESSMENT	40
1. FCC Compliant	41
1.1 SAR information	41
DECLARACIÓN DE CONFORMIDAD (SPANISH).....	43
1. Estándares de homologación europea	43
2. Conformidad FCC.....	44
2.1 Tasa de absorción específica (SAR)	44
REGULATORY AND TYPE APPROVAL INFORMATION.....	46
1. Directives and Standards.....	46
2. SAR Requirements Specific to Portable Mobiles.....	49
3. SELV Requirements	50
ROHS STATEMENT	51
DISPOSAL OF OLD ELECTRICAL AND ELECTRONIC EQUIPMENT DESCRIPTION	52
MTBF.....	53
SALES CONTACT.....	54

GENERAL NOTES

Product is deemed accepted by recipient and is provided without interface to recipient's products. The documentation and/or product are provided for testing, evaluation, integration and information purposes. The documentation and/or product are provided on an "as is" basis only and may contain deficiencies or inadequacies. The documentation and/or product are provided without warranty of any kind, express or implied. To the maximum extent permitted by applicable law, Matrix Electronica S.L.U. further disclaims all warranties; including without limitation any implied warranties of merchantability, completeness, fitness for a particular purpose and non-infringement of third-party rights. The entire risk arising out of the use or performance of the product and documentation remains with recipient. This product is not intended for use in life support appliances, devices or systems where a malfunction of the product can reasonably be expected to result in personal injury. Applications incorporating the described product must be designed to be in accordance with the technical specifications provided in these guidelines. Failure to comply with any of the required procedures can result in malfunctions or serious discrepancies in results.

Furthermore, all safety instructions regarding the use of mobile technical systems, including GSM products, which also apply to cellular phones, must be followed. Matrix Electronica S.L.U. or its suppliers shall, regardless of any legal theory upon which the claim is based, not be liable for any consequential, incidental, direct, indirect, punitive or other damages whatever (including, without limitation, damages for loss of business profits, business interruption, loss of business information or data, or other pecuniary loss) arising out the use of or inability to use the documentation and/or product, even if Matrix Electronica S.L.U. has been advised of the possibility of such damages. The foregoing limitations of liability shall not apply in case of mandatory liability, e.g. under the Spanish Product Liability Act, in case of intent, gross negligence, injury of life, body or health, or breach of a condition which goes to the root of the contract. However, claims for damages arising from a breach of a condition, which goes to the root of the contract, shall be limited to the foreseeable damage, which is intrinsic to the contract, unless caused by intent or gross negligence or based on liability for injury of life, body or health. The above provision does not imply a change on the burden of proof to the detriment of the recipient. Subject to change without notice at any time. The interpretation of this general note shall be governed and construed according to Spanish law without reference to any other substantive law.

IMPORTANT INFORMATION

This technical description contains important information for the start up and use of the MTX-GTW modems. Read it carefully before you start working with the MTX-GTW modems. The warranty will be void should damage occur due to non-compliance with these instructions for use. We cannot accept any responsibility for consequential loss.

SERVICE AND SUPPORT

To contact customer support please contact your local distributor/sales agent or use the details below:

Address: Alejandro Sánchez 109, 28019 Madrid (Spain)

Email: iotsupport@mtx2m.com

Website: mtx2m.com

REVISION INFORMATION

REVISION	DATE	AUTHOR	CHANGES
1.0	2014/09	RR	First draft
1.1	2014/10	AEM/TP	Language style revision
1.2	2014/12	AEM	Minor revision
1.3	2015/04	AEM	Minor revision
1.4	2015/04	RR	MTX-GTW versions added
1.5	2015/04	AEM	Product label information
1.6	2015/08	AEM	HW & FW revisions added, conformity assessment added
1.7	2017/06	JS	Conformity assessment added

HARDWARE REVISION	PRODUCTION DATE	CHANGES
1.01	2014/09	Initial version. Production date: Before year 2015 week 19 (1519): WiFi antenna connector SMA F Year 2015 week 19 (1519) and after: WiFi antenna connector SMA F RP
1.01A	2014/09	WiFi antenna SMA F RP


FIRMWARE REVISION	PRODUCTION DATE	CHANGES
1.00	2014/09	Initial release
1.01	2014/09	Minor revision and bug fixes
2.00	2015/06	3G PPP connections problem solved

DESCRIPTION

The MTX-GTW is designed to be driven by the TQMa28 module and offers PC core functionalities and standard interfaces. This user guide provides information about the components, features, connectors and signals available on the MTX-GTW.

● 1. Product Label

The label fixed to the bottom of a MTX device comprises the following information:

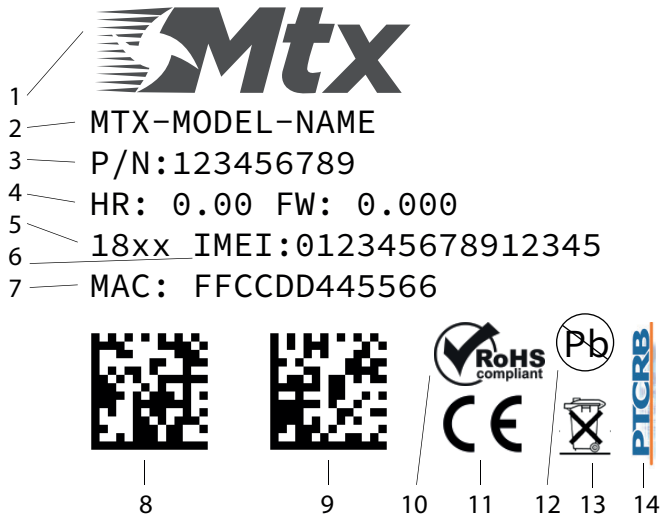

1. MTX logo
2. Product name (model)
3. Part number/ordering code
4. Hardware and firmware versions
5. Year/week of fabrication
6. IMEI number
7. MAC address
8. Data matrix code (IMEI)
9. Data matrix code (MAC)
10. RoHS symbol
11. CE logo
12. Pb-free symbol
13. WEEE symbol
14. PTCRB certification logo

WARRANTY

The information contained within this user guide, including but not limited to any product specification, is subject to change without notice. Matrix Electronica provides no warranty with regard to this user guide or any other information contained herein and hereby expressly disclaims any implied warranties of merchantability or fitness for any particular purpose with regard to any of the foregoing. Matrix Electronica assumes no liability for any damages incurred directly or indirectly from any technical or typographical errors or omissions contained herein or for discrepancies between the product and the uses guide. In no event shall Matrix Electronica be liable for any incidental, consequential, special, or exemplary damages, whether based on tort, contract or otherwise, arising out of or in connection with this user guide or any other information contained herein or the use thereof.

REFERENCES

- STK-MBa28 User Manual
- TQMa28 User Manual
- iMX28 Freescale Reference Manual

TECHNICAL DATA

● 1. System Architecture and System Functionality

1.1 Block Diagram

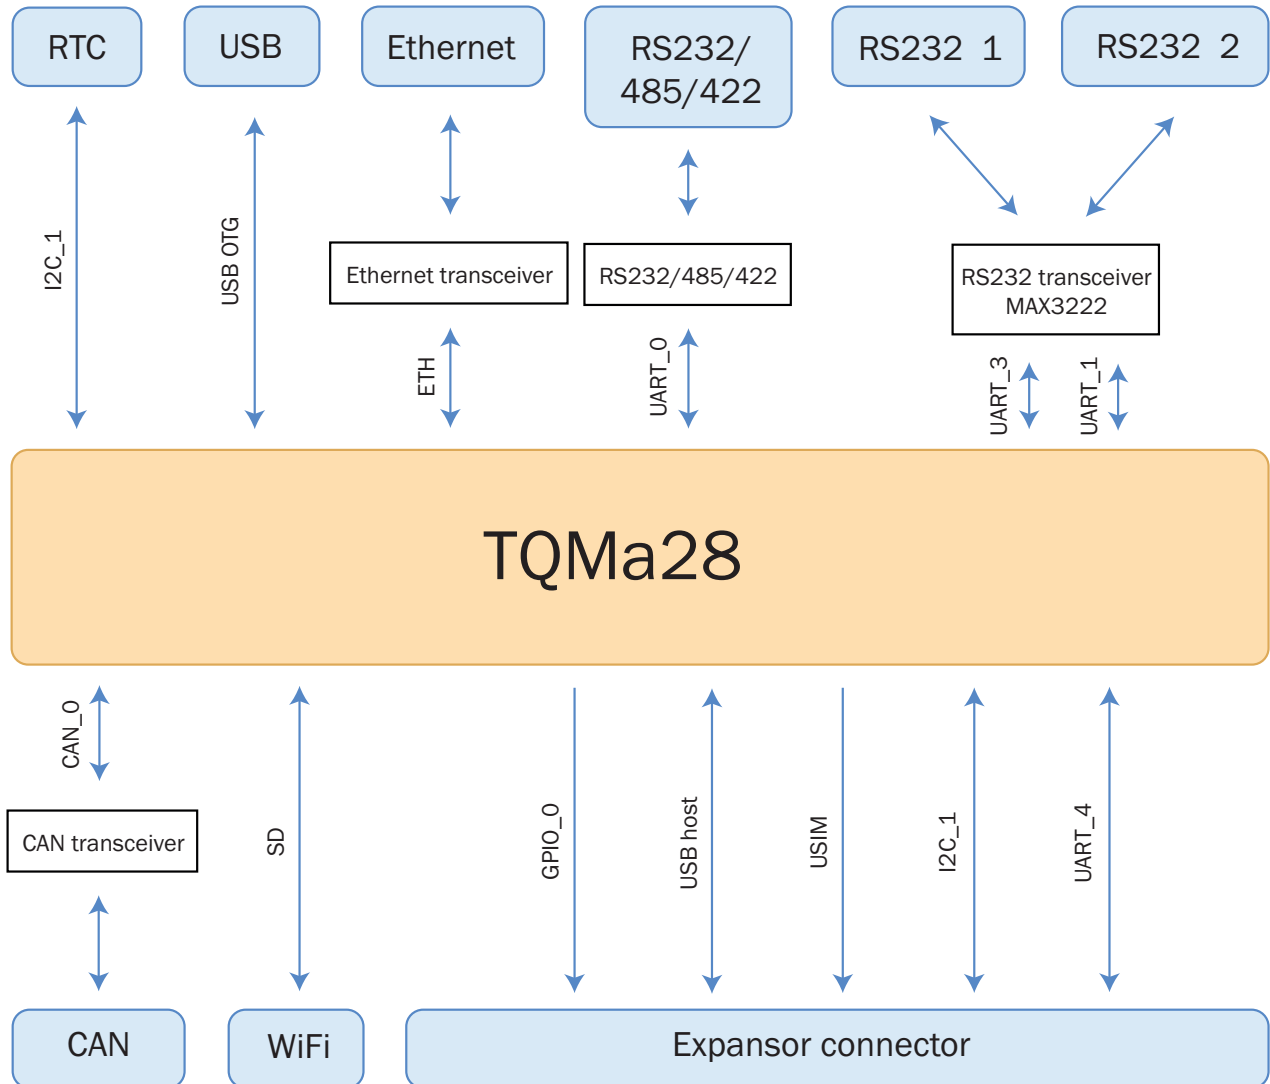


Illustration 1: MTX-GTW block diagram

1.2 Technical Data Electronics

The interfaces and system components listed in the following are implemented on the MTX-GTW. Due to the fact that the board can be installed in a casing, the interfaces are divided into external and internal interfaces.

1.2.1 External Interfaces

- 1x USB OTG 2.0
- 1x Ethernet
- 1x RS232/485/422
- 2x RS232
- 1x CAN
- 1x SIM Holder
- 1x Antenna connector

1.2.2 Internal Interfaces

- 1x TQMa28
- 1x WiFi b/g/n
- 3x Headers for specific extension

1.2.3 User's Interfaces

- 4x Status LEDs
- 1x DIP switch

1.2.4 System Components

- Temperature sensor
- EEprom
- RTC

1.3 Technical Data Mechanics, Design

Dimensions PCB (WxDxH): 78.1x66.8x37.2 mm

Weight: < 190g

ELECTRONIC SPECIFICATIONS

● 1. External Interfaces


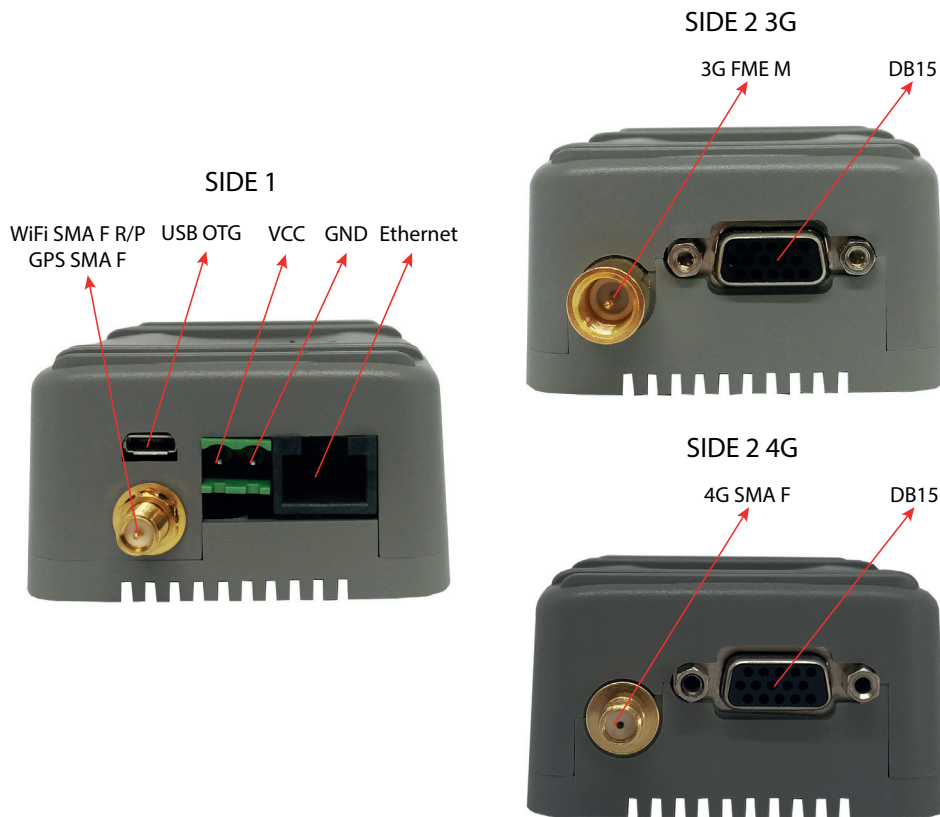


Illustration 2: MTX-GTW external interfaces

1.1 Function Specification

1.1.1 USB OTG

The USB OTG interface of the TQMa28 (USB0) is offered as a Mini USB AB-Type.

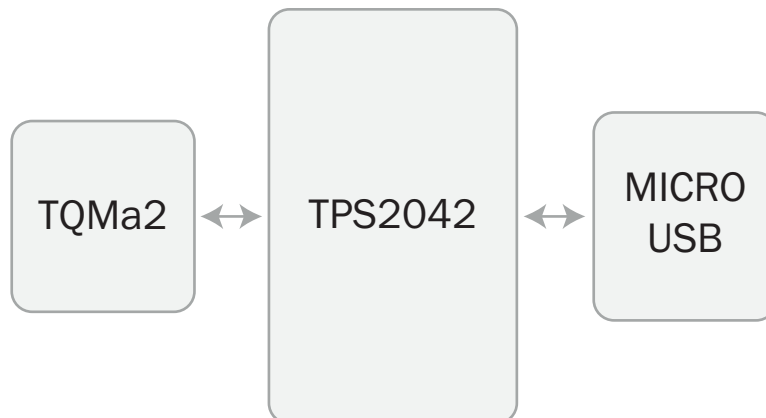

Type of media: USB OTG 2.0 Hi-Speed, 5V bus voltage (limited to 500mA)

Interface on module: USB OTG


Signal characteristic: Compatible with the Universal Serial Bus Specification REV. 2.0

ESD protection: $\pm 15\text{kV}$ human body model

MANUFACTURER	DESCRIPTION
MOLEX: 47590-0001	Right angle Micro USB AB

1.1.2 Ethernet

The MTX-GTW directly drives the Ethernet 1 interface. The SMSC LAN8720Ai is used as PHY.

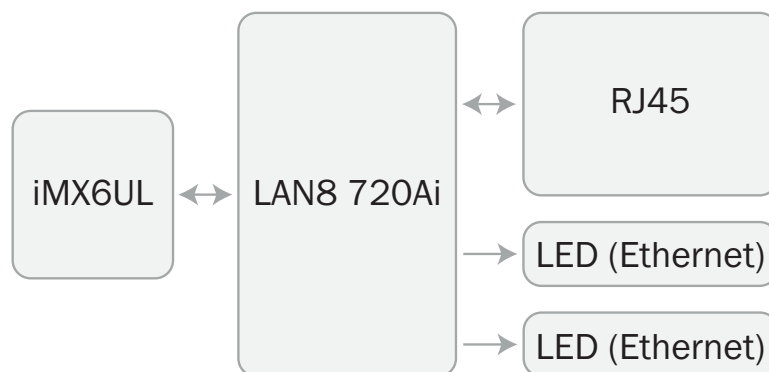

Type of media: 10/100 Mbit

Signal characteristic: Compatible with the IEEE-802.3 standard

Status LEDs: 2


Modes: MDI, Auto-MDIX

Interface on module: RMII/ENET0

MANUFACTURER	DESCRIPTION
Molex: 85502-5008	Right angle RJ45 jack

1.1.3 RS232/485/422

The AUART0 of the TQMa28 drives the RS232/485/422 interface on the MTX-GTW. The Maxim MAX3160 is used as a transceiver.

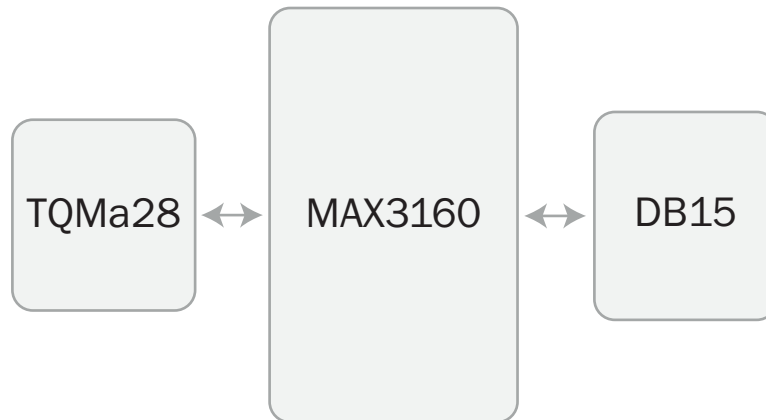


In addition, two signals are used to configure the Maxim transceiver in one of its operational modes:

SIGNAL	DESCRIPTION
SW1_3	RS485/RS232#
SW1_4	Half_Duplex/Full_Duplex#

Transfer rate: Up to 10Mbit/s (full-duplex)
Interface on module: AUART0
Handshake: RTS# used for clearing the transmission direction
ESD protection: $\pm 15\text{kV}$ human body model


The following tables show the configuration of the DB15 of the RS232/485/422 interface (DTE interface).
DB15 Connector pinout:

PIN	SIGNAL	TYPE	REMARK
2	RXD0	I	Receive Data
3	TXD0	O	Transmit Data
7	RTS0	O	Request to Send
8	CTS0	I	Clear To Send
14	GND	P	Ground



1.1.4 RS232_1

The AUART3 interface of the TQMA28 drives the RS232 interface of the MTX-GTW by default. The Maxim MAX3222 is used as a driver.

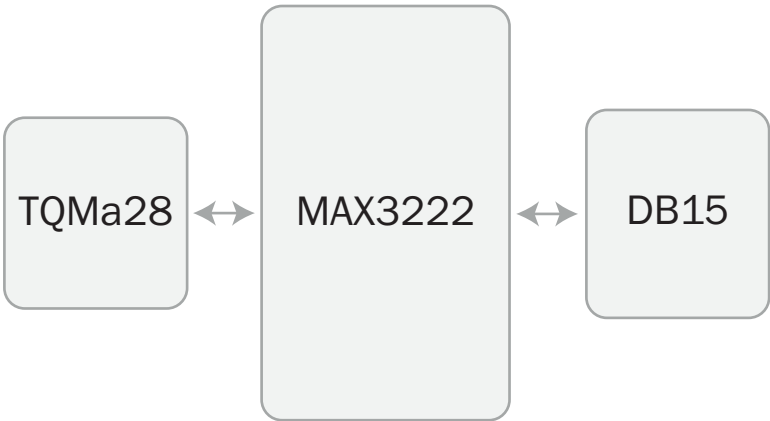


Transfer rate: Up to 250Kbit/s
Interface on module: AUART3
Handshake: None
ESD protection: ±15kV human body model


The following tables show the configuration of the DB15 of the RS232_1 interface.

DB15 Connector pinout:

PIN	SIGNAL	TYPE	REMARK
4	TXD1	O	Transmit Data
9	RXD1	I	Receive Data
14	GND	P	Ground



1.1.5 RS232_2

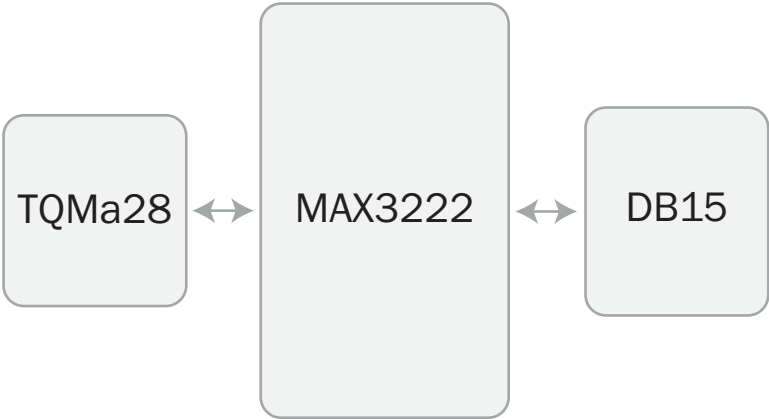


Transfer rate: Up to 250Kbit/s
Interface on module: AUART1
Handshake: None
ESD protection: ±15kV human body model

The following tables show the configuration of the DB15 of the RS232_2 interface.


DB15 Connector pinout:

PIN	SIGNAL	TYPE	REMARK
12	TXD2	O	Transmit Data
13	RXD2	I	Receive Data
14	GND	P	Ground



1.1.6 CAN

The CAN 0 port of the TQMA28 directly drives the interface on the MTX-GTW. The NXP TJA1051T/3 is used as a CAN transceiver.

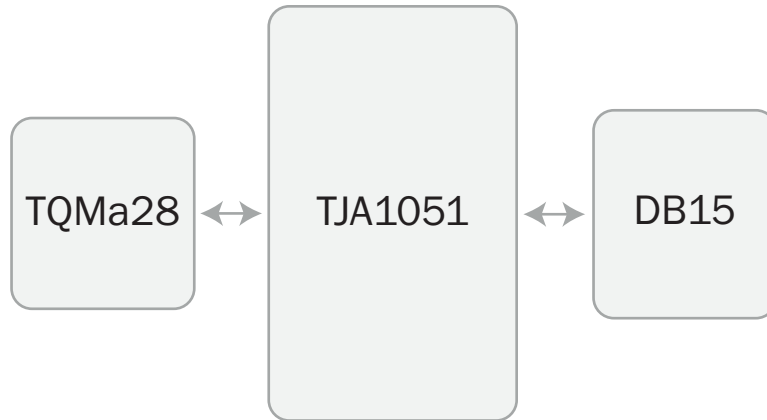

Transfer rate: Up to 1Mbit/s

Interface on module: CAN_0


Signal characteristic: Compatible with the ISO-11898 standard (CAN 2.0B)

ESD protection: $\pm 8\text{kV}$ human body model

The following tables show the configuration of the DB15 of the CAN interface.


DB15 Connector pinout:

PIN	SIGNAL	TYPE	REMARK
1	CANH	I/O	CAN High-Level I/O
6	CANL	I/O	CAN Low-Level I/O



1.1.7 Power Supply


For protective and EMC reasons the supply input of the MTX-GTW is designed very robustly.

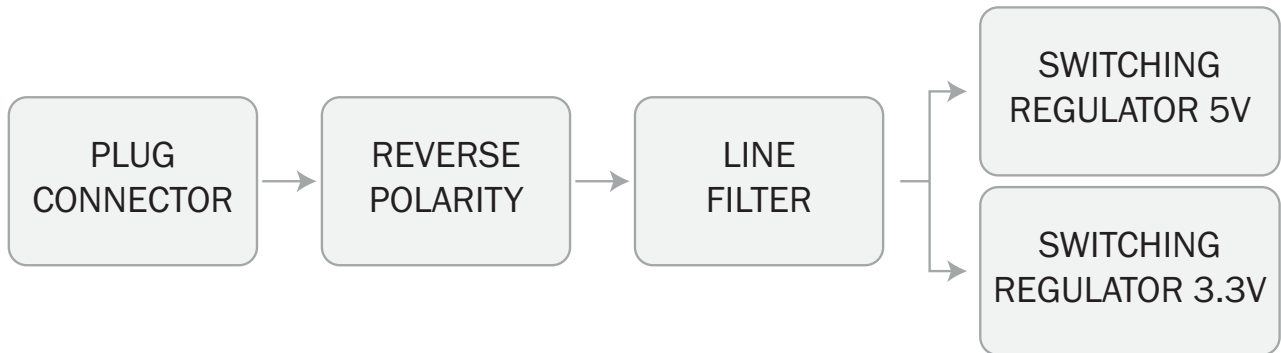

PARAMETER	MIN.	TYP.	MAX.	UNIT
DC Input Voltage	7	24	50	V
Power consumption		<2		W

Maximum device power consumption depends on different conditions and should be obtained on field. Some of the parameters that can increase the power consumption are:

- GSM status (Upload/Download/Idle) used band (2G, 3G, 4G) and signal quality
- WiFi status, mode (AP, managed...) and signal quality
- USB external devices connected
- DB9 external devices connected (as they can be supplied directly from the MTX)

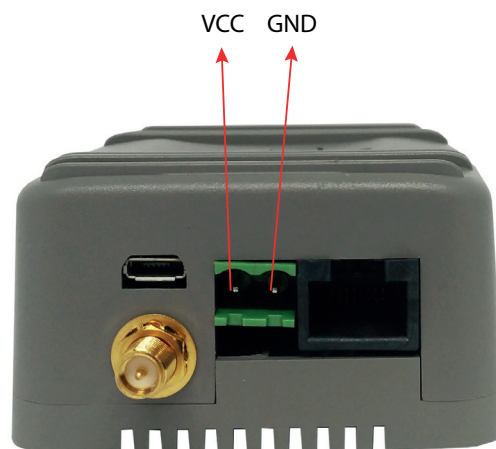

● 2. Internal Interfaces

2.1 TQMa28

The core of the MTX-GTW is the TQ Components TQMa28 module. The following table shows the key features of this module.

FEATURE	DESCRIPTION
Processor	Freescale iMX287 @ 454MHz
RAM	128MB DDR2
FLASH	4GB eMMC
EEPROM	32Kb

Detailed information about this module can be found on the following link:

<http://www.tq-group.com/en/products/industry-pcs/prod/embedded-modul-tqma28/extb/Main/productdetail/>

2.2 WiFi

The MTX-GTW can be ordered with an integrated Bluegiga WF111 Wi-Fi module. The following table shows the key features of this module.

FEATURE	REMARK
IEEE 802.11 b/g/n	Single 2.4GHz band. Symbol rate up to 7.2Mbps
Encryption	WEP, WPA and WPA2
Operation mode	Supports Client and Access Point (Up to 8 clients)
Module interface	SDIO

2.3 Expansion Connector

An expansion connector is available on the MTX-GTW. One complete UART interface (RX,TX,CTS,RTS), two additional two-wire UARTs, I2C, USB Host, USIM, and 4 GPIOs are available on this connector.

● 3. User Interfaces

3.1 Status LED

The MTX-GTW has four LEDs to inform the user about different status conditions. The following table shows the different LED indications.

LED	STATUS REMARK
DLp1	Power Supply OK. (Green LED)
DL1	Free for user information. Connected to GPIO3_6. (Red LED)
DL2	Ethernet link speed LED indication. On with 100Mbps, OFF with 10Mbps. (Red LED)
DL3	Ethernet link activity LED indication. (Green LED)

3.2 DIP Switch

The MTX-GTW has one Dip-Switch with configuration purposes. The following table shows information about the signals connected to the Dip Switch.

SW1:

PIN	SIGNAL	REMARK
1	LCD_D03	Recovery Switch (Default OFF= Normal Boot)
2	LCD_D00	Recovery Switch (Default OFF= Normal Boot)
3	SW1_3	Connected to RS485/RS232#. (Default OFF=RS232)
4	SW1_4	Connected to Half_Duplex/Full_Duplex#. (Default OFF = Full-Duplex)
5	VCC_OUT (3V3)	VCC_OUT (DB15_PIN10). ON = 3,3VDC
6	VCC_OUT (5V)	VCC_OUT (DB15_PIN10). ON = 5VDC
7	USB_OTG_ID	USB OTG Identification. (OFF=OTG, ON=Only Host)
8	GPIO_6	Input signal for User information. Connected to GPIO0_24

● 4. System Components

4.1 Temperature Sensor

On the TQMa28 module there is a National Semiconductor LM73 temperature sensor. It can be read out via I2C bus 1. The base address can be taken from the following table.

I2C BUS	POSITION	DEVICE	ADDRESS
1	TQMa28	Temperature sensor - LM73	0x49

4.2 EEPROM

On the TQMa28 module there is a 64Kibit EEPROM (ST Microelectronics M24C64-WDW6TP). The EEPROM is controlled via I2C bus 1 of the processor. The writing protection (WP) of the EEPROM is not available. The base address can be taken from the following table.

I2C BUS	POSITION	DEVICE	ADDRESS
1	TQMa28	EEPROM – M24C46	0x50

4.3 RTC

On the MTX-GTW board there is a DS1339U RTC module. The RTC is supplied by a super capacitor in order to maintain the information if the main supply is removed.

I2C BUS	POSITION	DEVICE	ADDRESS
1	MTX-GTW	RTC DS1339U-33	0x68


MTX-GTW VERSIONS

● 1. MTX-GTW-3G

The MTX-GTW-3G includes the Cinterion EHS5 3G modem. It also includes some features which are not available on the MTX-GTW version.

1.1 1-Wire

A 1-Wire interface is available on the MTX-GTW-3G via the Maxim DS2482-100 I2C chip.

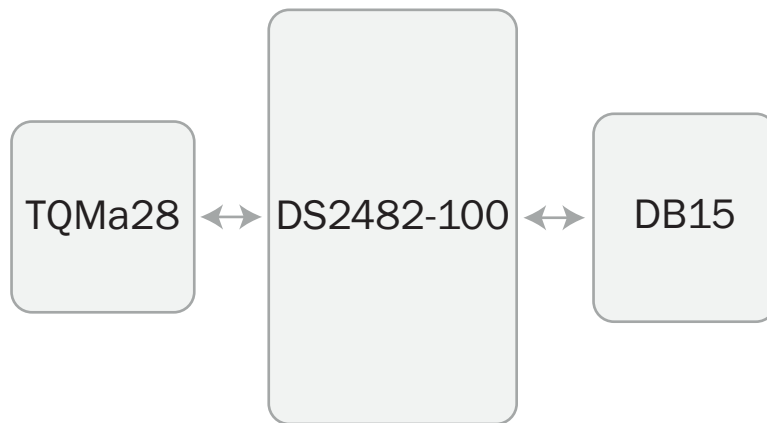


Transfer rate: Up to 400KHz

Interface on module: I2C1

Signal characteristic: Standard and Overdrive 1-Wire communication


The following table shows the configuration of the DB15 of the 1-Wire interface:

PIN	SIGNAL	TYPE	REMARK
5	1-Wire	I/O	1-Wire




1.2 Relay Output

The MTX-GTW-3G also includes a Relay Output available on the DB15 female connector.

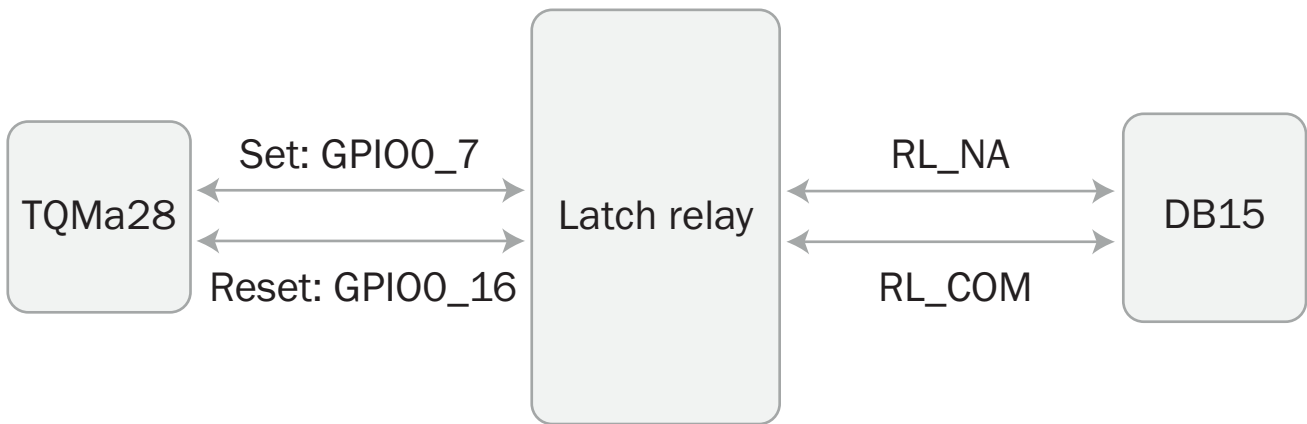

The following table shows the configuration of the DB15 of the Relay:

PIN	SIGNAL	TYPE	REMARK
11	RL_COM	I/O	Relay common pin
15	RL_NA	I/O	Relay normally open pin



1.3 GPIOs


The MTX-GTW-3G is able to support up to 4 GPIOs (IRQ capable) but they are multiplexed with other interfaces. The following table shows the configuration of the DB15 connector and the multiplexed interfaces.

PIN	SIGNAL	TYPE	REMARK
13	GPI 1	I	Shared with RX2 signal (GPIO3_4)
9	GPI 2	I	Shared with RX1 signal (GPIO3_12)
15	GPI 3	I	Incompatible with Relay NA signal (GPIO2_26)*
11	GPO 1	O	Incompatible with Relay COM signal (GPIO2_24)*

*Mounting option

1.4 Accelerometer

The MTX-GTW-3G includes the LIS331DLH ultra low power high performance 3-axes I2C accelerometer.

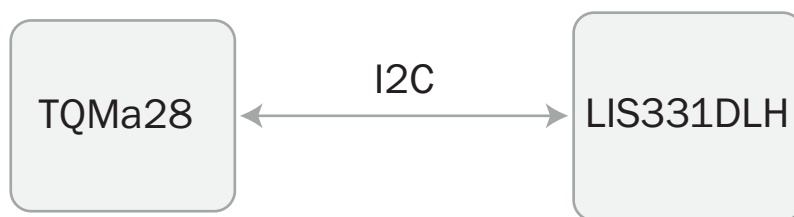


The following table shows the Accelerometer I2C configuration:

I2C BUS	POSITION	DEVICE	ADDRESS
1	MTX-GTW	LIS331DLH	0x19

1.5 Antennas Configuration

The MTX-GTW-3G has two external antenna connectors for the 3G and WiFi interfaces.

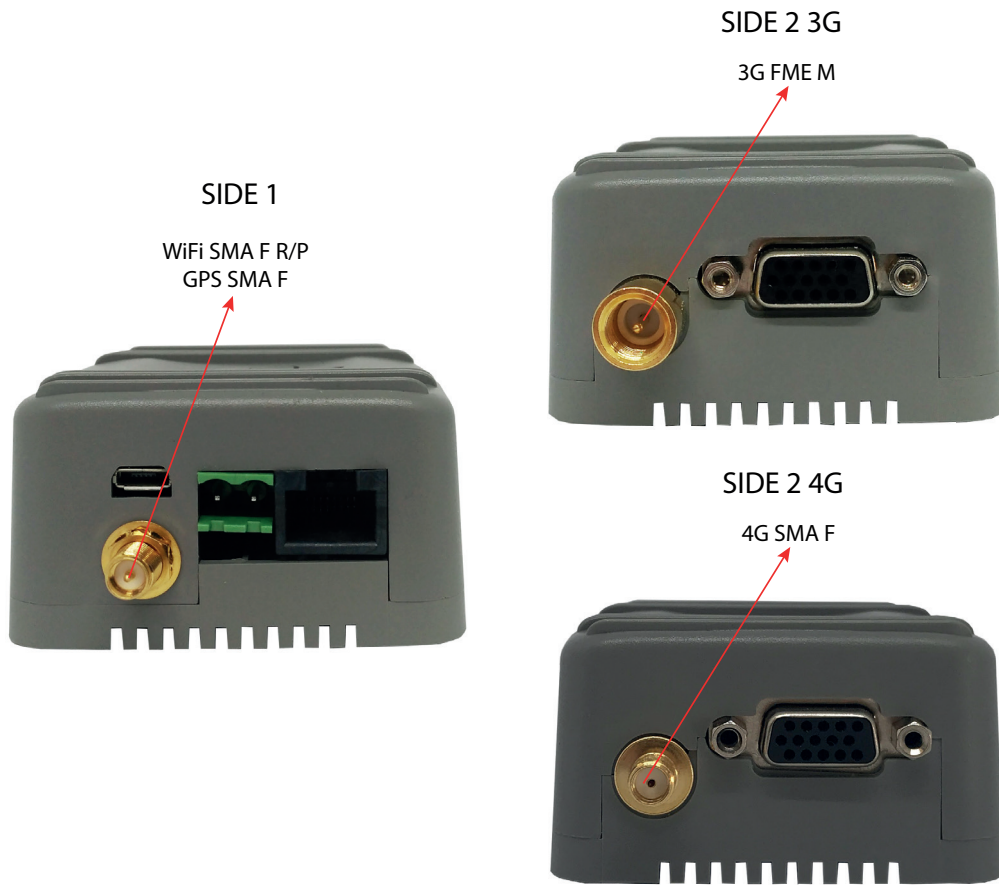


● 2. MTX-GTW-3G-GPS

The MTX-GTW-3G includes the Cinterion PHS8 3G modem which integrates a GPS receiver. It also includes some features which are not available on the MTX-GTW version.

2.1 1-Wire

A 1-Wire interface is available on the MTX-GTW-3G via the Maxim DS2482-100 I2C chip.

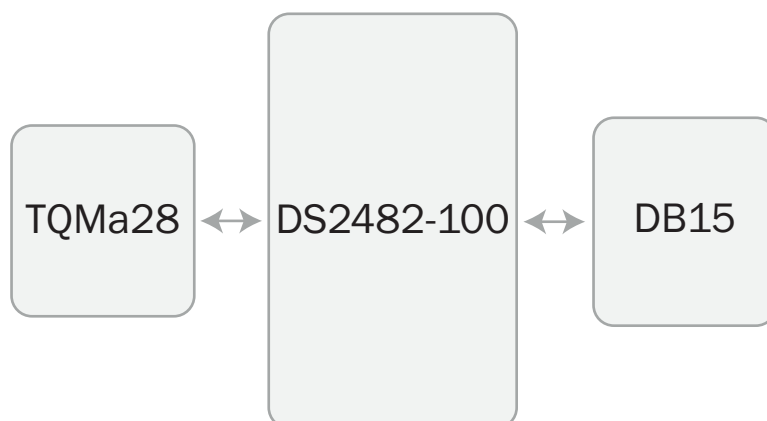


Transfer rate: Up to 400KHz

Interface on module: I2C1

Signal characteristic: Standard and Overdrive 1-Wire communication


The following table shows the configuration of the DB15 of the 1-Wire interface:

PIN	SIGNAL	TYPE	REMARK
5	1-WIRE	I/O	1-WIRE




2.2 Relay Output

The MTX-GTW-3G also includes a Relay Output available on the DB15 female connector. Voltage 30V, current 1A.

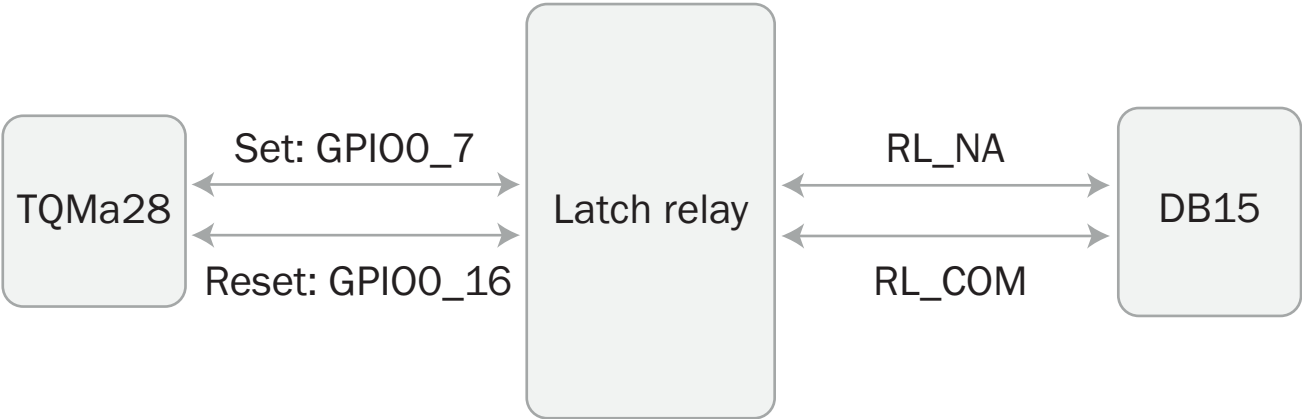

The following table shows the configuration of the DB15 of the Relay:

PIN	SIGNAL	TYPE	REMARK
11	RL_COM	I/O	Relay common pin
15	RL_NA	I/O	Relay normally open pin



2.3 GPIOs


The MTX-GTW-3G is able to support up to 4 GPIOs (IRQ capable) but they are multiplexed with other interfaces. The following table shows the configuration of the DB15 connector and the multiplexed interfaces.

PIN	SIGNAL	TYPE	REMARK
13	GPI 1	I	Shared with RX2 signal (GPIO3_4)
9	GPI 2	I	Shared with RX1 signal (GPIO3_12)
15	GPI 3	I	Incompatible with Relay NA signal (GPIO2_26)*
11	GPO 1	O	Incompatible with Relay COM signal (GPIO2_24)*

*Mounting option

2.4 Accelerometer

The MTX-GTW-3G includes the LIS331DLH ultra low power high performance 3-axes I2C accelerometer.

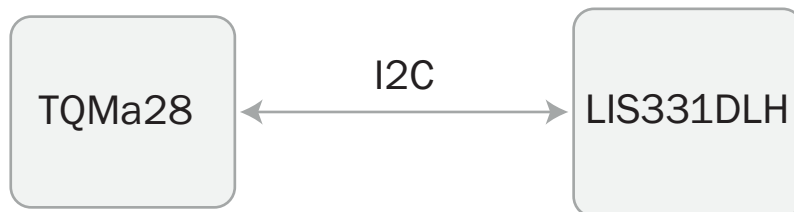


The following table shows the Accelerometer I2C configuration:

I2C BUS	POSITION	DEVICE	ADDRESS
1	MTX-GTW	LIS331DLH	0x19

2.5 Antennas Configuration


The MTX-GTW-3G-GPS has two external antenna connectors for the 3G and GPS interfaces. For the WiFi interface an internal PCB antenna is used.

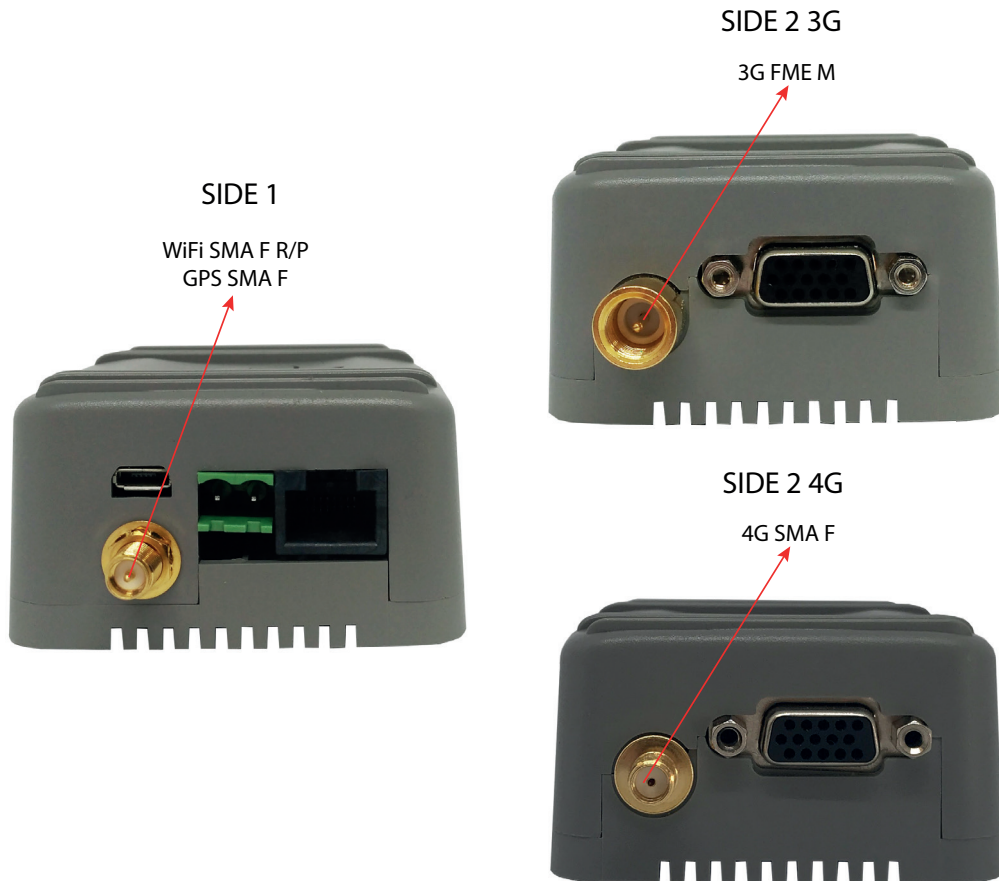


MECHANIC SPECIFICATIONS

● 1. Overview

The pictures below show the mechanical design of the terminal along with the positions of the different connectors, mounting holes and dimensions. The terminal case is made of durable PC/ABS plastic.

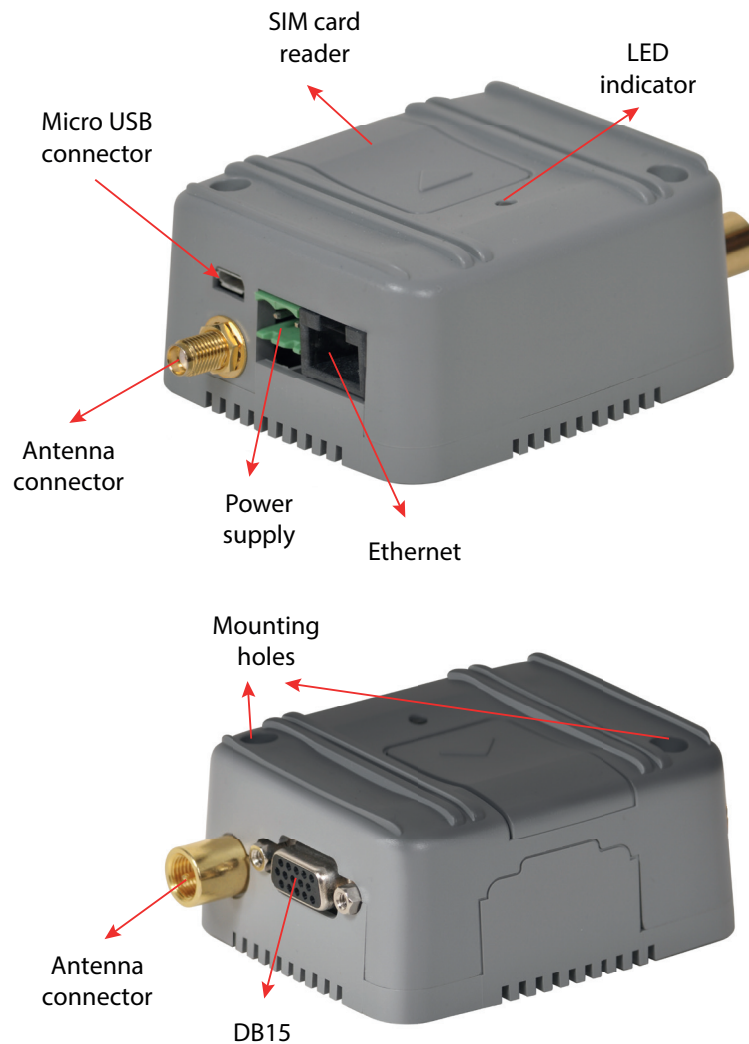

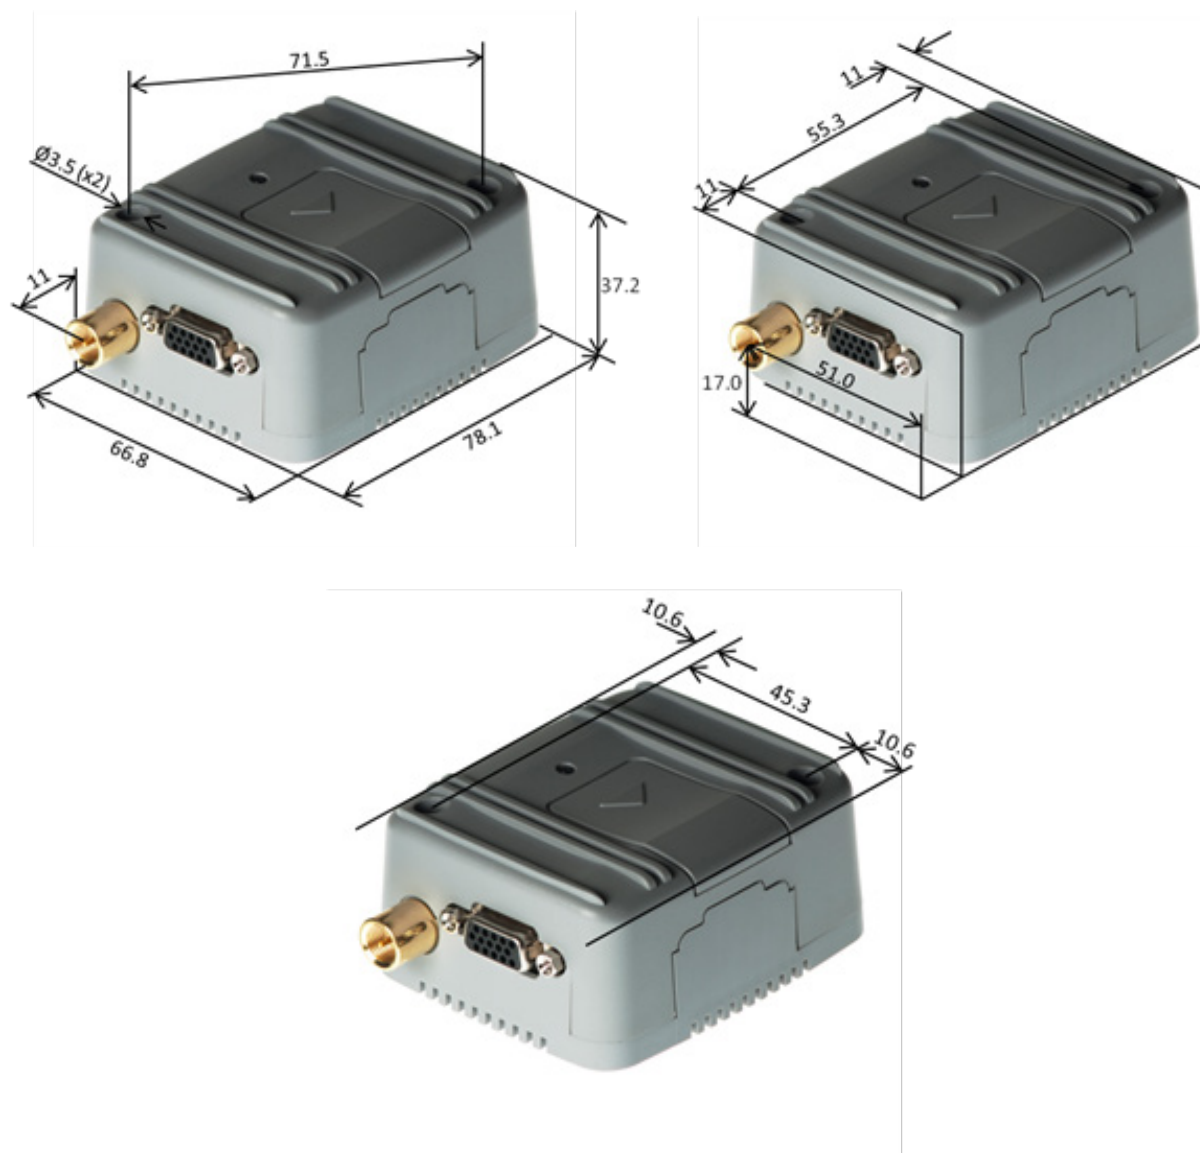

All dimensions are in millimeters.

● 2. Requirements for the superior system

The MTX-GTW has an enclosure which protects itself against dust, external impact and contact. However, as the MTX-GTW PCB can be bought as a standalone product, the following points must be taken into consideration.

2.1 Protection Against External Effects

The MTX-GTW PCB is not protected against dust, external impact and contact (IP00). An adequate protection has to be guaranteed by the surrounding system.

2.2 Thermal Management

The main heat source is the TQMa28. Information about the cooling of the TQMa28 is to be taken from its specification.

SAFETY REQUIREMENTS AND PROTECTION REGULATIONS

Please read the information in this section before starting your integration work!

● 1. Safety Instructions

PLEASE READ THESE SAFETY INSTRUCTIONS AND KEEP A COPY OF THEM.

- Always ensure that use of the modem is permitted. The modem may present a hazard if used in proximity to personal electronic medical devices. As a rule, the modem must not be used in hospitals, airports or planes.
- Never use the device at a gas station, refuelling point, blasting area or in any other environment where explosives may be present.
- Operating the device close to other electronic devices, such as antennas, television sets, and radios may cause electromagnetic interference.
- This product is intended to be used with the antenna or other radiating element at least 20cm away from any part of the human body. In applications where this rule cannot be applied, the application designer is responsible for providing the SAR measurement test report and declaration.
- You are responsible for observing your country's safety standards, and where applicable, the relevant wiring rules.

● 2. General Precautions

The MTXGTW terminal as a standalone item is designed for indoor use only. For outdoor use it must be integrated into a weatherproof enclosure. Do not exceed the environmental and electrical limits as specified in “Technical Data”.

- Avoid exposing the device to lighted cigarettes, naked flames or to extreme hot or cold temperatures.
- Never try to dismantle the device yourself. There are no components inside the modem that can be serviced by the user. If you attempt to dismantle the device, you may invalidate the warranty.
- The MTX-GTW terminal must not be installed nor located in areas where the surface temperature of the plastic case could exceed 85 °C.

In order to provide strain relief and to avoid transmitting excessive vibration to the device during installation, all cables connected to the MTX-GTW terminal must be secured or clamped immediately adjacent to the device’s connectors.

- To protect the power supply cables, and in order to comply with the fire safety requirements, when the unit is powered from a battery or a high current supply, a fast 1.25A fuse should be connected in line with the positive supply.
- Any incompatible components or products must not be connected to the MTX-GTW terminal.

Note! MTX-GTW distributors and sales offices may refuse warranty claims where evidence of product misuse is found.

● 3. SIM Card Precautions

Before handling the SIM card in your application, ensure that you are not charged with static electricity. Use proper precautions to avoid electrostatic discharges.

- When the SIM card hatch is opened, the SIM card connectors lie exposed under the SIM card holder.

Caution! Do not touch these connectors! If you do, you may release an electrical discharge that could damage the modem or the SIM card.

- When designing your application, the SIM card's accessibility should be taken into account. We always recommend that you have the SIM card protected by a PIN code. This will ensure that the SIM card cannot be used by an unauthorized person.

● 4. Antenna Precautions

If the antenna is to be mounted outside, consider the risk of lightning. Follow the instructions provided by the antenna manufacturer.

- Never connect more than one modem to a single antenna. The modem can be damaged by radio frequency energy from the transmitter of another modem.
- Like any mobile station, the antenna of the modem emits radio frequency energy. To avoid EMI (electromagnetic interference), you must determine whether the application itself, or equipment in the application's proximity, needs further protection against radio emission and the disturbances it might cause. Protection is secured either by shielding the surrounding electronics or by moving the antenna away from the electronics and the external signal cable.
- The modem and antenna may be damaged if either come into contact with ground potentials other than the one in your application. Beware: ground potentials are not always what they appear to be.

● 5. Radio Frequency (RF) Exposure and SAR

Your wireless modem device is a low-power radio transmitter and receiver (transceiver). When it is turned on, it emits low levels of radio frequency energy (also known as radio waves or radio frequency fields).

Governments around the world have adopted comprehensive international safety guidelines, developed by scientific organizations such as ICNIRP (International Commission on Non-Ionizing Radiation Protection) and IEEE (The Institute of Electrical and Electronics Engineers Inc.), through periodic and thorough evaluation of scientific studies. These guidelines establish permitted levels of radio wave exposure for the general population. The levels include a safety margin designed to assure the safety of all persons, regardless of age and health, and to account for any variations in measurements.

Specific Absorption Rate (SAR) is the unit of measurement for the amount of radio frequency energy absorbed by the body when using a transceiver. The SAR value is determined at the highest certified power level in laboratory conditions, but the actual SAR level of the transceiver while operating can be well below this value. This is because the transceiver is designed to use the minimum power required to reach the network.

The MTX-GTW wireless modem device has been approved for applications where the antenna is located more than 20cm from the body. In all other configurations the user is responsible for meeting the local SAR regulations.

Users of the MTX-GTW wireless modem device are responsible for ensuring that they meet the SAR regulatory requirements of the countries in which they intend to operate the device and that their documentation contains the relevant SAR declaration, certification information and user guidance as appropriate.

● 6. Personal Medical Devices

Wireless modem devices may affect the operation of cardiac pacemakers, hearing aids and certain other implanted equipment. If a minimum distance of 15 cm (6 inches) is maintained between the MTX-GTW modem radiating antenna and a pacemaker, the risk of interference is limited. If the user's application is likely to be situated in the vicinity of personnel, a suitable warning should be contained in the equipment manual to this effect.

CONFORMITY ASSESSMENT

RED Declaration of Conformity (DoC)

Unique identification of this DoC: MTX-GTW II RED DoC

We

MATRIX ELECTRÓNICA S.L., C/ Alejandro Sanchez 109, 28019 Madrid, Spain

declare under our sole responsibility that the products MTX-GTW family

MTX-GTW		199802110
MTX-GTW-3G (EHS6)	World Wide	199802120
MTX-GTW-4G-GPS (PLS8-E)		199802123
MTX-GTW-3G-GPS (EHS8)		199802143
MTX-GTW CUSTOM RAL6032		199802127
MTX-GTW-3G CUSTOM RAL6032		199802138
MTX-GTW-3G-W5		199802166

object of the declaration described above is in conformity with the relevant Union harmonization Legislation: RED Directive 2014/53/EU and R&TTE Directive 99/5/EC

The following harmonized standards and/or other normative documents were applied: are labeled with the CE conformity mark.



- EMC (art 3.1.b): EN 301 489-1 V2.2.0 EN 301 489-52 V1.1.0, EN 301 489-3 V2.1.1
- RADIO SPECTRUM (art 3. 2): EN 301 511 V12.5.1, EN 301 908-1 V11.1.1, EN 301 908-2 V11.1.1, EN 300 440 V2.1.1
- SAFETY (art 3.1.a): EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
- RF SAFETY: EN62311:2008

The technical documentation relevant to the above equipment will be held at

MATRIX ELECTRÓNICA S.L., C/ Alejandro Sanchez 109, 28019 Madrid, Spain

Madrid, 15/01/2018

Mr. J. Vicente

Managing Board

● 1. FCC Compliant

MTX-GTW and any variants contain FCC ID: QIPEHS6. The FCC Equipment Authorization Certification for the EHS6 Module is listed under the FCC identifier QIPEHS6

Industry Canada Certification Number: 7830A-EHS6 granted to Gemalto M2M GmbH.

The Cinterion reference application of the EHS6 Module registered under the above identifier is certified to be in accordance with the following Rules and Regulations of the Federal Communications Commission (FCC). Power listed is ERP for Part 22 and EIRP for Part 24. It is compliant with FCC regulations.

Equipment class: PCS Licensed Transmitter

Notes: Quad band GSM/GPRS Modem

1.1 SAR information

Cinterion Wireless Modules models: EHS6 is marketed without a defined antenna.

The Maximum Antenna Gain when using indoor antennas depends on the distance from the antenna to any nearby persons when in normal operation. It should not exceed the values shown on the table below.

According to the limit in 47 CFR 1.1310, we get the value of the maximum antenna gain as follows:

The maximum measured power output in the 850 MHz band is 1866.38 mW (32.71 dBm, see 7layers test report MDE_Siem_0714_FCCb).

The maximum permissible exposure is defined as 47 CFR 1.1310 with 0.55773 mW/cm².

The maximum measured power output in the 1900 MHz band is 974.99 mW (29.89 dBm, see 7layers test report MDE_Siem_0714_FCCc).

The maximum permissible exposure is defined as 47 CFR 1.1310 with 1 mW/cm².

According to the limit in 47 CFR 1.1310, we get the value of the maximum antenna gain as follows:

$$S = P \cdot G / 4\pi R^2$$

$$S = 0.55773 \text{ mW/cm}^2 \text{ or } 1 \text{ mW/cm}^2$$

$$P = 1866.38 \text{ mW or } 974.99 \text{ mW}$$

$$R = 20 \text{ cm or } 100 \text{ cm}$$

$$\pi = 3.1416$$

$$G(\text{dBi}) = 10 \cdot \log_{10}(G)$$

Solving for G; the maximum antenna gain is:

BAND	DISTANCE	MAXIMUM GAIN IN dBi
850MHz	20cm	1.7669
850MHz	50cm	9.7257
1900MHz	20cm	7.1227
1900MHz	50cm	15.0815

DECLARACIÓN DE CONFORMIDAD (SPANISH)

MATRIX ELECTRÓNICA S.L., C/ Alejandro Sanchez 109, 28019 Madrid, Spain

● 1. Estándares de homologación europea

Declaramos bajo nuestra responsabilidad que los productos MTX-GTW que contienen un modulo celular Cinterion EHS6 (tipo L30960-N2950-A100), al cual se refiere esta declaración, están conformes con la Directiva RED 2014/53/EU

- EMC (art 3.1.b): EN 301 489-1 V2.2.0, EN 301 489-52 V1.1.0, EN 301 489-3 V2.1.1
- RADIO SPECTRUM (art 3. 2): EN 301 511 V12.5.1, EN 301 908-1 V11.1.1, EN 301 908-2 V11.1.1, EN 300 440 V2.1.1
- SAFETY (art 3.1.a): EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
- RF SAFETY: EN62311:2008

Estos estándares armonizados permiten etiquetar al producto con el marcado CE



La documentación técnica referente al equipo anterior está disponible en:

MATRIX ELECTRÓNICA S.L., C/ Alejandro Sanchez 109, 28019 Madrid, Spain

Madrid, 30/05/2017

Sr. J. Vicente

Managing Board

● 2. Conformidad FCC

MTX-GTW y todas sus variantes contienen el FCC ID: QIPEHS6. El Certificado de Autorización de Equipo de la FCC para el módulo EHS6 está listado con el identificador FCC QIPEHS6

Número de Certificación de Industria en Canadá: 7830A-EHS6 asignado a Gemalto M2M GmbH.

El formulario de referencia del módulo EHS6 registrado bajo el anterior identificador está conforme con las siguientes Reglas y Regulaciones de la Comisión Federal de Comunicaciones (FCC). La potencia listada como ERP para la parte 22 y como EIRP para la parte 24 cumple con las regulaciones de la FCC.

Clase de equipo: Transmisor PCS Licenciado

Notas: Quad band GSM/GPRS Modem

2.1 Tasa de absorción específica (SAR)

El módulo Cinterion EHS6 es comercializado sin una antena definida. La ganancia máxima de antena usando antenas de interior depende de la distancia de esta a las personas cercanas y en condiciones normales no debe sobrepasar los límites mostrados en la tabla siguiente.

La máxima potencia de salida medida en la banda de 850MHz es 1866.38 mW (32.71 dBm, ver el reporte de test de 7layers MDE_Siem_0714_FCCb).

La máxima exposición permisible se define en 47 CFR 1.1310 con un valor de 0.55773 mW/cm².

La máxima potencia de salida medida en la banda de 1900 MHz es 974.99 mW (29.89 dBm, ver el reporte de test de 7layers MDE_Siem_0714_FCCc).

La máxima exposición permisible se define en 47 CFR 1.1310 con un valor de 1 mW/cm².

De acuerdo al límite en 47 CFR 1.1310, obtenemos el valor de la máxima ganancia de antena como sigue:

$$S = P \cdot G / 4\pi R^2$$

$$S = 0.55773 \text{ mW/cm}^2 \text{ o } 1 \text{ mW/cm}^2$$

$$P = 1866.38 \text{ mW o } 974.99 \text{ mW}$$

$$R = 20 \text{ cm o } 100 \text{ cm}$$

$$\pi = 3.1416$$

$$G(\text{dBi}) = 10 \cdot \log_{10}(G)$$

Despejando G; la máxima ganancia de antena es:

BANDA	DISTANCIA	GANANCIA MÁXIMA EN dBi
850MHz	20cm	1.7669
850MHz	50cm	9.7257
1900MHz	20cm	7.1227
1900MHz	50cm	15.0815

REGULATORY AND TYPE APPROVAL INFORMATION

● 1. Directives and Standards

The MTX-GTW modem has been designed to comply with the directives and standards listed below.

It is the responsibility of the application manufacturer to ensure compliance of the final product with all provisions of the applicable directives and standards, as well as with the technical specifications provided in this document.

DIRECTIVES	
RED Directive 2014/53/EU and R&TTE Directive 99/5/EC	Directive of the European Parliament on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity. The product is labeled with the CE conformity mark.
ECE-R 10	Economic Commission for Europe (ECE) Regulation No. 10: Uniform provisions concerning the approval of vehicles with regard to electromagnetic compatibility.
2002/95/EC (RoHS 1) 2011/65/EC (RoHS 2)	Directive of the European Parliament and of the Council of 27 January 2003 (and revised on 8 June 2011) on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS).

STANDARDS OF NORTH AMERICAN TYPE APPROVAL	
CFR Title 47	Code of Federal Regulations, Part 22 and Part 24 (Telecommunications, PCS); US Equipment Authorization FCC.
OET Bulletin 65 (Edition 97-01)	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields.
UL 60 950-1	Product Safety Certification (Safety requirements).
NAPRD.03 V5.15	Overview of PCS Type certification review board Mobile Equipment Type. Certification and IMEI control. PCS Type Certification Review board (PTCRB).
RSS132 (Issue2) RSS133 (Issue5)	Canadian Standard.

STANDARDS OF EUROPEAN TYPE APPROVAL

3GPP TS 51.010-1	Digital cellular telecommunications system (Release 7); Mobile Station (MS) conformance specification.
ETSI EN 301 511 V9.0.2	Global System for Mobile communications (GSM); Harmonized standard for mobile stations in the GSM 900 and DCS 1800 bands covering essential requirements under article 3.2 of the R&TTE directive (1999/5/EC).
GCF-CC V3.49	Global Certification Forum - Certification Criteria.
ETSI EN 301 489-01 V1.9.2	Electromagnetic Compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common Tech. Requirements.
ETSI EN 301 489-07 V1.3.1	Electromagnetic Compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 7: Specific conditions for mobile and portable radio and ancillary equipment of digital cellular radio telecommunications systems (GSM and DCS).
ETSI EN 301 489-24 V1.5.1	Electromagnetic Compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 24: Specific conditions for IMT-2000 CDMA Direct Spread (UTRA) for Mobile and portable (UE) radio and ancillary equipment.
EN 301 908-01 V5.2.1	Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS) and User Equipment (UE) for IMT-2000 Third Generation cellular networks; Part 1: Harmonized EN for IMT-2000, introduction and common requirements of article 3.2 of the R&TTE Directive.
EN 301 908-02 V5.2.1	Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS) and User Equipment (UE) for IMT-2000 Third Generation cellular networks; Part 2: Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD) (UE) covering essential requirements of article 3.2 of the R&TTE Directive.
EN 62311:2008	Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz).
IEC/EN 60950-1:2006+A11:2009+A1:2010+A12:2011	Safety of information technology equipment.

REQUIREMENTS OF QUALITY

IEC 60068 Environmental testing.

DIN EN 60529 IP codes.

STANDARDS OF THE MINISTRY OF INFORMATION INDUSTRY OF THE REPUBLIC OF CHINA

SJ/T 11363-2006 “Requirements for Concentration Limits for Certain Hazardous Substances in Electronic Information Products.” (2006-06)

“Marking for Control of Pollution Caused by Electronic Information Products.” (2006-06)

SJ/T 11364-2006

According to the “Chinese Administration on the Control of Pollution caused by Electronic Information Products” (ACPEIP) the EPUP, i.e., Environmental Protection Use Period, of this product is 20 years as per the symbol shown here, unless otherwise marked. The EPUP is valid only as long as the product is operated within the operating limits described in the Gemalto M2M Hardware Interface Description?

Please see next table for an overview of toxic or hazardous substances or elements that might be contained in product parts in concentrations above the limits defined by SJ/T 11363-2006.

部件名称 Name of the part	有毒有害物质或元素 Hazardous substances					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
金属部件 (Metal Parts)	○	○	○	○	○	○
电路模块 (Circuit Modules)	X	○	○	○	○	○
电缆及电缆组件 (Cables and Cable Assemblies)	○	○	○	○	○	○
塑料和聚合物部件 (Plastic and Polymeric parts)	○	○	○	○	○	○
<p>O: 表示该有毒有害物质在该部件所有均质材料中的含量均在SJ/T11363-2006 标准规定的限量要求以下。 Indicates that this toxic or hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in SJ/T11363-2006.</p> <p>X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T11363-2006标准规定的限量要求。 Indicates that this toxic or hazardous substance contained in at least one of the homogeneous materials used for this part <i>might</i> exceed the limit requirement in SJ/T11363-2006.</p>						

● 2. SAR Requirements Specific to Portable Mobiles

Mobile phones, PDAs or other portable transmitters and receivers incorporating a GSM module must be in accordance with the guidelines for human exposure to radio frequency energy. This requires the Specific Absorption Rate (SAR) of portable EHS6 based applications to be evaluated and approved for compliance with national and/or international regulations.

Since the SAR value varies significantly with the individual product design, manufacturers are advised to submit their product for approval if designed for portable use. For European markets the relevant directives are mentioned below. It is the responsibility of the manufacturer of the final product to verify whether or not further standards, recommendations or directives are in force outside these areas.

Products intended for sale in US markets

EN 59005/ANSI C95.1: Considerations for evaluation of human exposure to Electromagnetic Fields (EMFs) from Mobile Telecommunication Equipment (MTE) in the frequency range 30MHz – 6GHz

Products intended for sale in European markets

EN 50360: Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300MHz - 3GHz)

Please note that SAR requirements are specific only for portable devices and not for mobile devices as defined below:

- **Portable device:** A portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the user's body.
- **Mobile device:** A mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the user's body or that of nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and cannot be easily moved to another location.

● 3. SELV Requirements

The power supply connected to the MTX-GTW shall be in compliance with the SELV requirements defined in EN 60950-1.

ROHS STATEMENT

The MTX-GTW modem is compliant with the 2002/95/EC Directive of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS).



DISPOSAL OF OLD ELECTRICAL AND ELECTRONIC EQUIPMENT DESCRIPTION



This symbol, applied on our products and/or on its packaging, indicates that this product should not be treated as household waste when you wish to dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resources. For more detailed information about the recycling of this product, please contact your local city office, household waste disposal service or the retail store where you purchased this product.

MTBF

Standard IEC61709 (SN 29500) “Electronic components - Reliability - Reference conditions for failure rates and stress models for conversion.”

Ambient temperature: 25°C

24h/day powered and 22h/day idle mode, 2h/day talktime

MTTF/h: 1685393

MTTF/year 192.40

SALES CONTACT

MATRIX MADRID

Matrix Electrónica S.L.
C/ Alejandro Sánchez 109
28019 Madrid, Spain

Phone 1: 902.19.81.46
Phone 2: +34-91.560.27.37
Fax 1: 902.99.54.14
Fax 2: +34-91.565.28.65

MATRIX BARCELONA

Matrix Electrónica S.L.
@SantCugat Business Park
Av. Via Augusta 15-25, B2- 8, oficinas 9-10
08174 Sant Cugat del Vallés, Barcelona, Spain

Phone: 902.19.81.46
Fax: 902.99.54.14

MATRIX DURANGO

Matrix Electrónica S.L.
Pol. Aliendalde 11, oficina 2G
48200 Durango, Vizcaya, Spain

Phone: 902.19.81.46
Fax: 902.99.54.14

MATRIX VALENCIA

Matrix Electrónica S.L.
Valencia, Spain

Phone: 902.19.81.46
Fax: 902.99.54.14

MATRIX SEVILLA

Matrix Electrónica S.L.
Sevilla, Spain

Phone: 902.19.81.46
Fax: 902.99.54.14

MATRIX LISBOA

LusoMatrix Lda.
Av. Coronel Eduardo Galhardo 7-1°C
1170-105 Lisboa, Portugal

Phone: +351-218.162.625
Fax: +351-218.149.482

MATRIX CHICAGO

Matrix USA LLD
1112 W. Boughton Rd, Suite 346
Bolingbrook, IL 60440
USA

mtxm2m.com