COMPTEUR TRIPHASÉ

The bi-directional measurements make the meter suitable for active and reactive energy and power monitoring appli-cations, and also perfect for solar PV measurements. With a RS485 Modbus port, the meter is easy for remote communication with Webdyn gateways. The multi-function helps you to count the energy consumed in different time periods.

SPÉCIFICATIONS TECHNIQUES

Description	COMPTEUR TRIPHASÉ
Température de fonctionnement	-25 à +55°C
Température de stockage	-40 à +70°C
Humidité relative	0 à 95% (non condensante)
Catégorie d'installation	CAT II
Tension	CA : 230 V Plage : 176-276 VCA
Courant	Base (Ib/Iref) : 5A Max (Imax) : 100A Mini (Imin) : 0.25A

Description	COMPTEUR TRIPHASÉ
Consommation	<2W/10kVA
Fréquence	50 Hz
Tension phase-neutre	100 à 289V
Tension entre phases	173 à 500V
Interfaces	RS485, sortie d'impulsions x 2
Affichage	LCD with backlit
Lecture maxi	Écran LCD rétro-éclairé

RÉFÉRENCE

– AC1302-01 : Sens'Meter - Compteur triphasé

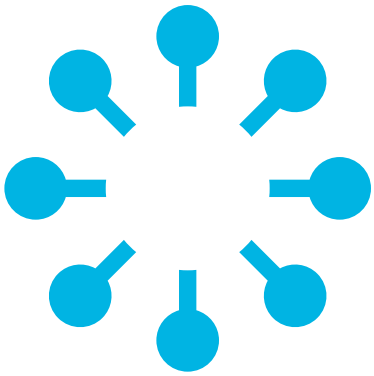

WEBDYN

flexitron group

WEBDYN
flexitron group

FRANCE

26 RUE DES GAUDINES
78100
SAINT GERMAIN EN LAYE

+33 13879 042 940

CONTACT@WEBDYN.COM
FRANCE: KEVIN.BONANNO@WEBDYN.COM
EXPORT: JOHANNES.WINKELMANN@WEBDYN.COM

INDE

803-804, 8TH FLOOR, VISHWADEEP
BUILDING, DISTRICT CENTRE,
JANAKPURI, NEW DELHI, 110058

+91 11 41519011

GURDEEP.JUNEJA@WEBDYN.COM

COPYRIGHT @WEBDYN - V15/04/2021