



## 24V DC Power Supply

Single output industrial DIN Rail Power Supply.


## TECHNICAL SPECIFICATIONS

Description	POWER SUPPLY
Output	Voltage: 24V Current range: 0~0.63A Rated range: 0.63A Rated power: 15.2W
Input	AC voltage: 85 to 264 VAC Frequency range: 47 to 63 Hz
Protections	short circuit/overload/over voltage
Cooling	by free air convection
Working humidity	20~90% RH non-condensing
Working temperature	-30~+70°C
Storage temperature	-40~+85°C
Storage humidity	10~95% RH non-condensing

Description	POWER SUPPLY
Possible installation	can be installed on DIN Rail TS-35/7.5 or 15
Isolation	Class II
Indicator	LED indicator for power on
No load power consumption	<0.3W
Loan burn-in text	100% full
Dimension	17.5x90x54.5mm (WxHxD)

## REFERENCE

– AC0103-00-DR15: 24V DC Power Supply

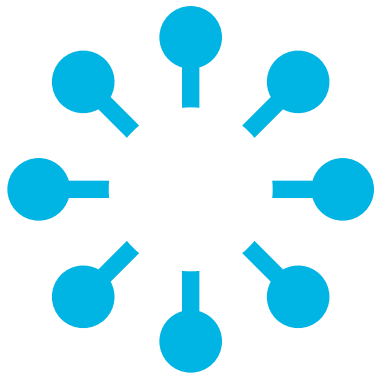

# WEBDYN

 flexitron group



**WEBDYN**  
 flexitron group

## FRANCE



26 RUE DES GAUDINES  
78100  
SAINT GERMAIN EN LAYE



+33 13879 042 940



CONTACT@WEBDYN.COM  
FRANCE: KEVIN.BONANNO@WEBDYN.COM  
EXPORT: JOHANNES.WINKELMANN@WEBDYN.COM

## INDIA



803-804, 8TH FLOOR, VISHWADEEP  
BUILDING, DISTRICT CENTRE,  
JANAKPURI, NEW DELHI, 110058



+91 11 41519011



GURDEEP.JUNEJA@WEBDYN.COM