



WALL MOUNT DEPORTED ANTENNA

The antenna is intended to equip GSM / GPRS / Edge cellular equipment operating on 900/1800 MHz frequency ranges.


This antenna is equipped with a cable of 5, 10 or 20 meters (see parts references below) low loss integral with the whip, which makes it possible to find the best location for the GSM/GPRS signal.

TECHNICAL SPECIFICATIONS

Description	WALL DEPORTED ANTENNA
Type	Omnidirectional
Frequency	800/900/1800/1900 MHz
Impedance	50 ohms
Polarization	vertical
ROS	<1.5
Connector	SMA male
Fixation	Wall bracket
Materials	Resistant to marine climates
Temperature	-40 to +85°C
Power max	100 Watts

REFERENCES

- AC0201-01: GPRS bi-bands deported antenna with 5m cable
- AC0201-02: GPRS bi-bands deported antenna with 20m cable
- AC0201-03: GPRS bi-bands deported antenna with 10m cable

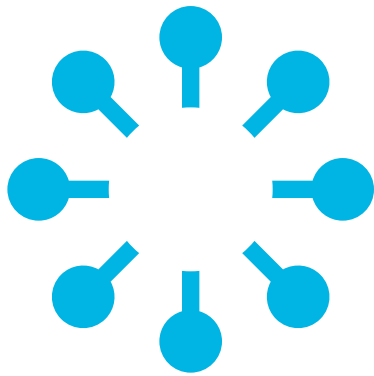

WEBDYN

 flexitron group



WEBDYN
 flexitron group

FRANCE



26 RUE DES GAUDINES
78100
SAINT GERMAIN EN LAYE



+33 13879 042 940



CONTACT@WEBDYN.COM
FRANCE: KEVIN.BONANNO@WEBDYN.COM
EXPORT: JOHANNES.WINKELMANN@WEBDYN.COM

INDIA



803-804, 8TH FLOOR, VISHWADEEP
BUILDING, DISTRICT CENTRE,
JANAKPURI, NEW DELHI, 110058



+91 11 41519011



GURDEEP.JUNEJA@WEBDYN.COM