



OUTDOOR TEMPERATURE SENSOR


Sensor for outdoor temperature measurement: solar production plants and buildings. Stainless Steel external probe for faster response.

TECHNICAL SPECIFICATIONS

| Description | OUTDOOR TEMPERATURE SENSOR |
|---------------------------------|--|
| Output ampere | 1x 4..20 mA, max. load 500 Ω |
| Power supply | 15..24V, 0,5 Watts under 24V |
| Output signal range temperature | -50 to +50°C |
| Accuracy temperature | $\pm 0,5^{\circ}\text{C}$ (typ. at 21 °C within default measuring range) |
| Protection | IP65 according to EN 60529 |
| Cable entry | Flextherm M16, for wire $\text{Ø}=3.7$ mm, removable |
| Electrical connection | removable plug-in terminal, max. 2,5 mm ² |
| Ambient condition | max. 85% rH |

REFERENCE

– AC1101-01: Outdoor Temperature Sensor

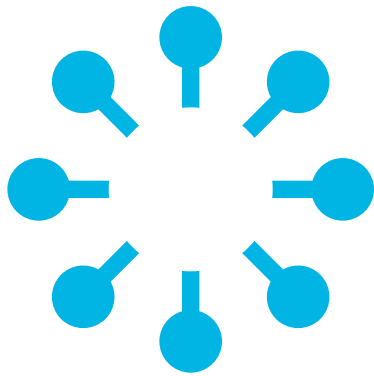

WEBDYN

 flexitron group



WEBDYN
 flexitron group

FRANCE



26 RUE DES GAUDINES
78100
SAINT GERMAIN EN LAYE



+33 13879 042 940



CONTACT@WEBDYN.COM
FRANCE: KEVIN.BONANNO@WEBDYN.COM
EXPORT: JOHANNES.WINKELMANN@WEBDYN.COM

INDIA



803-804, 8TH FLOOR, VISHWADEEP
BUILDING, DISTRICT CENTRE,
JANAKPURI, NEW DELHI, 110058



+91 11 41519011



GURDEEP.JUNEJA@WEBDYN.COM