



THREE PHASE METER


The bi-directional measurements make the meter suitable for active and reactive energy and power monitoring applications, and also perfect for solar PV measurements. With a RS485 Modbus port, the meter is easy for remote communication with Webdyn gateways. The multi-function helps you to count the energy consumed in different time periods.

TECHNICAL SPECIFICATIONS

Description	THREE PHASE METER
Operating temperature	-25 to +55°C
Storage temperature	-40 to +70°C
Output	2 pulse output 1 Modbus RTU output
Accuracy	MID B+D: Class I
Default Modbus Address	1-247
Connection	RS485
Power connection	up to a maximum of 100A
DIN Rail	4 DIN Rail modules

REFERENCE

– AC1302-01: Single Phase Meter

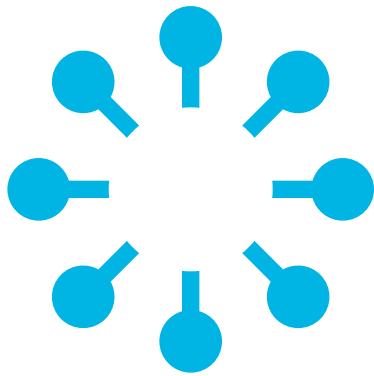

WEBDYN

 flexitron group



WEBDYN
 flexitron group

FRANCE



26 RUE DES GAUDINES
78100
SAINT GERMAIN EN LAYE



+33 13879 042 940



CONTACT@WEBDYN.COM
FRANCE: KEVIN.BONANNO@WEBDYN.COM
EXPORT: JOHANNES.WINKELMANN@WEBDYN.COM

INDIA



803-804, 8TH FLOOR, VISHWADEEP
BUILDING, DISTRICT CENTRE,
JANAKPURI, NEW DELHI, 110058



+91 11 41519011



GURDEEP.JUNEJA@WEBDYN.COM