



1. Script license management

As scripts are single-purchase software options, they are encrypted and require the generation and activation of a license.

1.1 License generation


Licenses are generated by Webdyn. The following information must be obtained from the sales department:

- **UID / MAC Address / Serial Number:** e.g. WPM019571
- **script article code:** e.g. PR08-02

Once this information has been transmitted and the order validated, the license is generated `<UID>_licence.ini` and can be transmitted by Webdyn.

1.2 License activation via integrated web server

License activation takes place in the **System>Actions** tab.

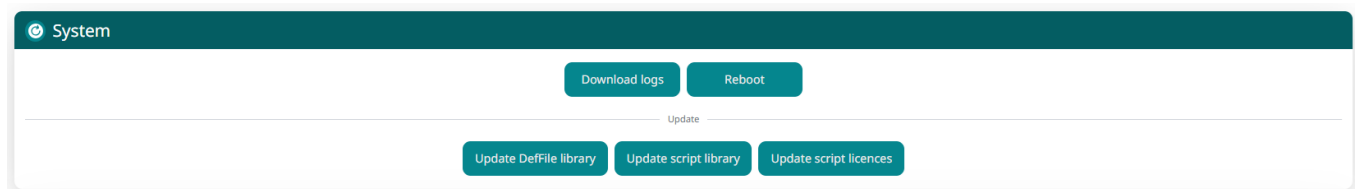

actions

The **Update script Licences** button triggers a connection to the Webdyn server to retrieve the licenses associated with the hub. The **Log** button shows whether licenses are available and have been transferred.

Once the licenses have been retrieved, in the **Control** tab, the associated scripts must then indicate **Active** instead of **Missing/Inactive**.

ActivePowerRegulation	Active power regulation	6.0	Active		Disabled	☐	:
Decouplage	Decouplage	8	Missing/Invalid		Disabled	☐	:

script activation

Here, the `Active Power Regulation` script has a license and the `Decouplage` script does not.

If no remote connectivity exists, it is also possible to load the license from the generated file. In the **Control** tab, you can import the license file.



script import



1.3 License activation by main server

To activate a script license, you need to upload the `<UID>_licence.ini` file to the main server configuration directory (default `/DEF`).

The next time you connect, the license will be downloaded and activated on the hub.

Warning

If the name of the concentrator has been changed, it is necessary to modify the name of the license file to match the modified name.

No need to modify the contents of the license file