



## 8 ANALOG INPUT MODBUS SLAVE


8 Channel DIN-Rail Analog Input Modules MODBUS over RS485 Serial Interface.

### TECHNICAL SPECIFICATIONS

Description	ANALOG INPUT MODBUS SLAVE
Input types	0-20 mA, 4-20 mA, 0-80mV 0-1.25 V, 0-5 V, 0-10 V, 1-5 V Thermocouple types: J, K, T, R, S, B and N
Accuracy	±0.25% of reading
Zero offset	user adjustable over full range for each channel
Sampling	100mS per channel
Port	RS485,2 wire
Protocol	Modbus RTU
Baud rate settable	2400, 4800, 9600, 19200, 38400, 57600, 115200
Parity settable	none, even, odd
Supply operated	20~32 VDC

### REFERENCE

– AC1202-01: 8 Analog Input Modbus Slave

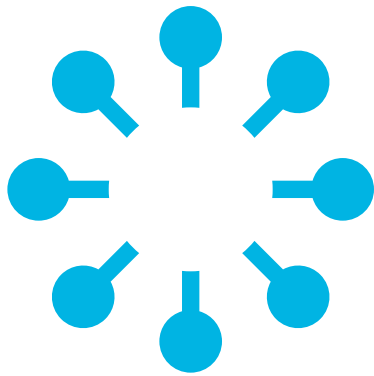

# WEBDYN

 flexitron group



**WEBDYN**  
 flexitron group

## FRANCE



26 RUE DES GAUDINES  
78100  
SAINT GERMAIN EN LAYE



+33 13879 042 940



CONTACT@WEBDYN.COM  
FRANCE: KEVIN.BONANNO@WEBDYN.COM  
EXPORT: JOHANNES.WINKELMANN@WEBDYN.COM

## INDIA



803-804, 8TH FLOOR, VISHWADEEP  
BUILDING, DISTRICT CENTRE,  
JANAKPURI, NEW DELHI, 110058



+91 11 41519011



GURDEEP.JUNEJA@WEBDYN.COM